

IceSpy Notion Pro

notion pro

Affordable wireless monitoring
without compromise

SMS Module

The SMS module is an optional add-on to the Notion Pro radio system to provide out of condition and /or system alarms generated from the Notion Pro wireless monitoring system via SMS text messages. Alarm groups are set within the Notion Pro software allowing specific types of alarms from specific sensors to be directed to individuals or groups. This can be further refined by specifying days, and times within those days, that alarms should be sent to the members of any particular alarm group.



The SMS module uses our own proven protocols. The GSM module has an on-board micro controller acting as watchdog for the system, should any problem with network connectivity be detected the unit will be automatically re-set and re-connected to the network.

The on-board LEDs indicate power on (green), SMS message sent (yellow) and SMS message failed (red) a local display also indicates functions such as a GSM signal strength.

A SIM card is required.

Product Features

- Wall mounted bracket supplied
- On-board GSM module, 2G and 3G
- OLED display for signal strength and alarm message status
- Optional wifi communication
- On-board relays configured for communications and power failure
- Battery backup for 24 hours
- Easily accessible battery for replacement by the user, when required
- Up to 5 years battery life
- Complies with BS EN 12830
- Complies with RoHS, EU directives and WEEE
- Carries CE Marking

Benefits


- Discrete easily mountable unit
- Provides real time SMS text alerts
- Provides early warning via text message of fridge or freezer failure safe-guarding stock
- On-board battery backup to enable SMS sending during power failures

Always ask for a
long-range signal
strength test when
buying any radio
system.
We can prove ours
to be unrivalled.

TECHNICAL SPECIFICATIONS

IN-TA001	
Dimensions:	195 x 148 x 45mm
Weight:	450g
Case materials:	ABS
IP rating:	IP53
Operating Temp:	0°C to +40°C
Storage Temp:	-40°C to +85°C
Power Supply:	12V regulated power supply
Battery Back Up:	24 hours
Battery Type:	7 x 1.5V NiMH Pack
Communications:	TCP/IP Via RJ45 connector Wi-Fi option available
Cellular Network Interface	
Module Type:	Telit HE910
Bands:	Quad
Aerial Connection:	SMA socket
Aerial Type:	Stubby straight/right angle and remote mount on 2mtrs cable
User Interface:	128 x 64 pixel OLED display
Test Message:	Push button
LED Indication:	Red (SMS fail) Yellow (SMS Good) Green (Power)

Schematic:

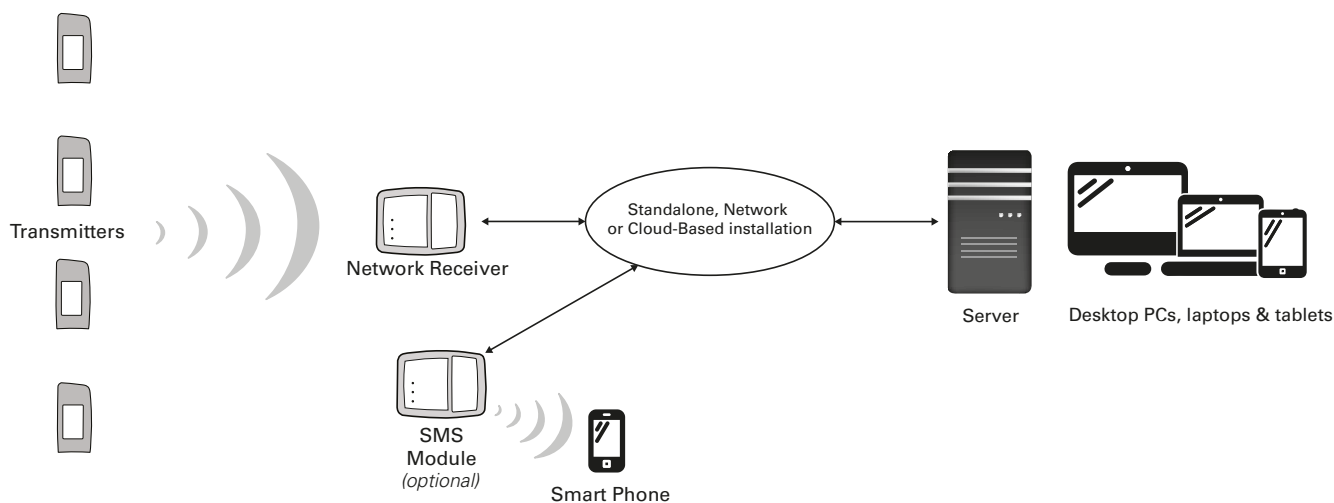

Disclaimer

The information contained herein is believed to be reliable. The IMC Group Ltd is not responsible for any incorrect or incomplete information on this datasheet and the information or product may be changed without notice. Customers should obtain and verify the latest relevant information before placing orders for IMC products.

Version 1